

Detecting Parkinson's Disease – Python Machine Learning Project

What is Parkinson's Disease?

Parkinson's disease is a progressive disorder of the central nervous system affecting movement and inducing tremors and stiffness. It has 5 stages to it and affects more than 1 million individuals every year in India. This is chronic and has no cure yet. It is a neurodegenerative disorder affecting dopamine-producing neurons in the brain.

What is XGBoost?

XGBoost is a new Machine Learning algorithm designed with speed and performance in mind. XGBoost stands for eXtreme Gradient Boosting and is based on decision trees. In this project, we will import the XGBClassifier from the xgboost library; this is an implementation of the scikit-learn API for XGBoost classification.

Detecting Parkinson's Disease with XGBoost – Objective

To build a model to accurately detect the presence of Parkinson's disease in an individual.

Detecting Parkinson's Disease with XGBoost – About the Python Machine Learning Project



In this Python machine learning project, using the <u>Python libraries</u> scikit-learn, numpy, pandas, and xgboost, we will build a model using an XGBClassifier. We'll load the data, get the features and labels, scale the features, then split the dataset, build an XGBClassifier, and then calculate the accuracy of our model.

Dataset for Python Machine Learning Project

You'll need the UCI ML Parkinsons dataset for this; you can <u>download it</u> <u>here</u>. The dataset has 24 columns and 195 records and is only 39.7 KB.

Prerequisites

You'll need to install the following libraries with pip:

pip install numpy pandas sklearn xgboost

You'll also need to install Jupyter Lab, and then use the command prompt to run it:

C:\Users\DataFlair>jupyter lab

This will open a new JupyterLab window in your browser. Here, you will create a new console and type in your code, then press Shift+Enter to execute one or more lines at a time.

Steps for Detecting Parkinson's Disease with XGBoost

Below are some steps required to practice Python Machine Learning Project

_



1. Make necessary imports:

```
import numpy as np
import pandas as pd
import os, sys
from sklearn.preprocessing import MinMaxScaler
from xgboost import XGBClassifier
from sklearn.model_selection import train_test_split
from sklearn.metrics import accuracy score
```

Screenshot:

```
[1]: #DataFlair - Make necessary imports
   import numpy as np
   import pandas as pd
   import os, sys
   from sklearn.preprocessing import MinMaxScaler
   from xgboost import XGBClassifier
   from sklearn.model_selection import train_test_split
   from sklearn.metrics import accuracy_score
```

2. Now, let's read the data into a DataFrame and get the first 5 records.


```
#DataFlair - Read the data

df=pd.read_csv('D:\\DataFlair\\parkinsons.data')

df.head()
```

Output Screenshot:



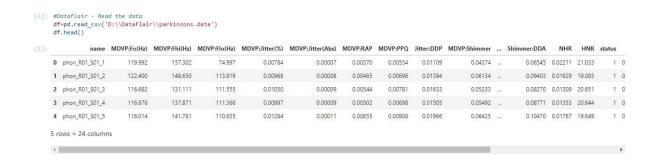

3. Get the features and labels from the DataFrame (dataset). The features are all the columns except 'status', and the labels are those in the 'status' column.

```
#DataFlair - Get the features and labels

features=df.loc[:,df.columns!='status'].values[:,1:]

labels=df.loc[:,'status'].values

Screenshot:

[3]: #DataFlair - Get the features and labels
```

labels=df.loc[:,'status'].values

features=df.loc[:,df.columns!='status'].values[:,1:]

4. The 'status' column has values o and 1 as labels; let's get the counts of these labels for both- o and 1.

```
#DataFlair - Get the count of each label (0 and 1) in labels
print(labels[labels==1].shape[0], labels[labels==0].shape[0])
```

Output Screenshot:



```
[4]: #DataFlair - Get the count of each label (0 and 1) in labels
print(labels[labels==1].shape[0], labels[labels==0].shape[0])
147 48
```

We have 147 ones and 48 zeros in the status column in our dataset.

5. Initialize a MinMaxScaler and scale the features to between -1 and 1 to normalize them. The MinMaxScaler transforms features by scaling them to a given range. The fit_transform() method fits to the data and then transforms it. We don't need to scale the labels.

```
#DataFlair - Scale the features to between -1 and 1
scaler=MinMaxScaler((-1,1))
x=scaler.fit_transform(features)
y=labels
```

Screenshot:

```
[5]: #DataFlair - Scale the features to between -1 and 1
    scaler=MinMaxScaler((-1,1))
    x=scaler.fit_transform(features)
    y=labels
```

6. Now, split the dataset into training and testing sets keeping 20% of the data for testing.

```
#DataFlair - Split the dataset
x_train,x_test,y_train,y_test=train_test_split(x, y, test_size=0.2,
random_state=7)
```

Screenshot:



```
[6]: #DataFlair - Split the dataset
    x_train,x_test,y_train,y_test=train_test_split(x, y, test_size=0.2, random_state=7)
```

7. Initialize an XGBClassifier and train the model. This classifies using eXtreme Gradient Boosting- using *gradient boosting algorithms* for modern data science problems. It falls under the category of Ensemble Learning in ML, where we train and predict using many models to produce one superior output.

```
#DataFlair - Train the model
model=XGBClassifier()
model.fit(x train,y train)
```

Output Screenshot:

8. Finally, generate y_pred (predicted values for x_test) and calculate the accuracy for the model. Print it out.



```
# DataFlair - Calculate the accuracy
y_pred=model.predict(x_test)
print(accuracy_score(y_test, y_pred)*100)
```

Output Screenshot:

```
[8]: # DataFlair - Calculate the accuracy
    y_pred=model.predict(x_test)
    print(accuracy_score(y_test, y_pred)*100)
    94.87179487179486
[ ]:
```

Summary

In this Python machine learning project, we learned to detect the presence of Parkinson's Disease in individuals using various factors. We used an XGBClassifier for this and made use of the sklearn library to prepare the dataset. This gives us an accuracy of 94.87%, which is great considering the number of lines of code in this python project.

Hope you enjoyed this Python project. We have already provided you the links for more interesting Python Projects at the top of the blog.